

FL-2 Faces

This machine should be used for applying the plastic material protection (film).

Apply and cut the film in **2 flat faces** of the profiles. Ideal guide profile.


Vertical adjustable rollers in width, for a good centering and easy movement of the profiles filming.

The machine uses rollers as a film applicator, and the that is rotated by a motor and automatically cuts the film electrical resistance. This adequately protected.

The positioning and cutting of the film is done automatically, a sensor detects the onset of the profile, allowing the machine is then complete the process of placement.

The machine body is resistant ensuring their accuracy.

The high quality of this machine and its ease of operation make it suitable for use by operators.

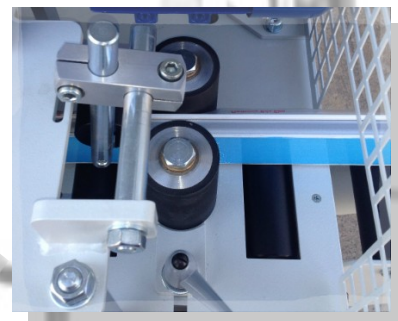

ESB-64058050 C/ Puigbarral, 44 Nau 4F Pol.
Ind. Can Petit 08227 TERRASSA, BARCELONA
(SPAIN)

Tel: (+34) 93 789 29 93
Mail: export@rpaluminium.com
admin@rpaluminium.com

FL Family

FL-2 Faces



FL-2 Faces

Maximum length profile	Unlimited
Height max. profile	110 mm.
Width max. profile	100 mm.
Width film coil	20 a 180 mm.
Thick film coil	35 a 100 micras
OutsideØ film coil	300 mm.
Motor	0 / 5 CV
Working pressure	1-6 kg.
Working height	940 mm
Measures mm. .	1400x910x1250

Technical Data



Overall Dimensions

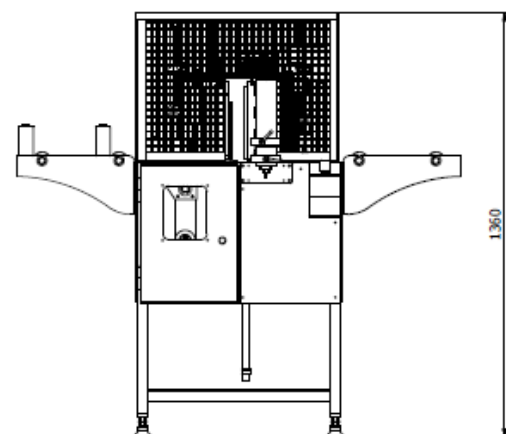
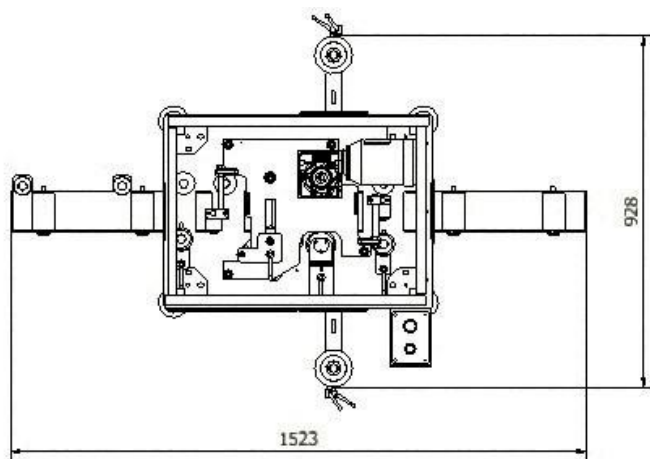


ADDITIONAL MATERIAL

Roller bench entry 0,5 m.
 Roller bench exit 0,5 m.
 Installation, use and maintenance.

OPTIONAL MATERIAL

Roller bench entry and exit 3,9 m. Ref.: BR-1
 Roller bench entry and exit 1,85 m. Ref.: BR-2
 Downloader profiles. Ref.: DES-2



Mono 220v 1Kw –
 230V –50/60 HZ

160 kg.

6 +7 bar